

## Great Awareness, Easy Control



---

Save cable wiring

---

One USB cable for control and power

---

Smart design

---

Milky lens that harmonizes with every environment



### Terminal Connection

Display status for self-checkout and similar systems



### Built into Equipment

Status notification of PC controlled equipment like printers.



### PC Connection

Interlock software alarm

## Various Mounting Methods

NE-SN-USB

Magnet mounting



1/4-inch screw mounting

\*Obtain tripod separately.



NE-WN-USB

Pole bracket  
NE-001D



Wall mounting bracket  
NE-002D



1/2" NPT Bracket  
SZP-092D



\*Mounting example

## Easy Control with Software Library

- Easy control by using the software library downloaded from our website.  
(Control can also be made according to protocol specifications for operating systems other than the supported ones.)
- Demo apps and sample codes can be downloaded from our website.

## Dedicated Driver not Required

- Control is possible without installing dedicated drivers because it is an HID class device.

## Specifications

Model		NE-SN-USB	NE-WN-USB
Rated voltage		DC5V (USB bus power)	
Operating Voltage Range		Rated voltage $\pm 5\%$ (conforms to USB 2.0 standard)	
Rated Current Consumption	Maximum	205mA	170mA
	Conditions	Lighting Color: White Alarm Sound: Alarm pattern "No.1 continuous sound" Volume Level: Maximum	
Operating Ambient Temperature		-20°C to +50°C	-25°C to +60°C
Operating Ambient Humidity		90% RH or less, non-condensing	
Mounting Location		Weather protected location	
Mounting Direction		All directions	All directions (Upright only when waterproofing is required)
Protection Rating		IP20	IP65
Sound Pressure		Typ. 65dB	Typ. 85dB
Environmental Conditions		Facing forward; 0.5m from front of unit Alarm pattern "No.2 sweep sound"	Facing forward; 1m from front of unit Alarm pattern "No.2 sweep sound"
Luminous Color		Multi-color (7 colors) (Red, Green, Blue, Amber, Cyan, Purple, White)	

## Model Number Configuration


# NE-N-USB

Specifications


S : Stationary/Magnet mounting/1/4 inch Screw mounting  
W : 2-point hole screw mounting

## External View (mm)

■ NE-SN-USB




■ NE-WN-USB



<Mounting dimension drawing>

■ 2-point hole screw mounting (NE-WN-USB)

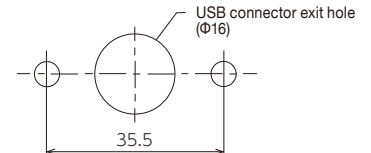

## PATLITE Corporation

PATLITE (U.S.A.) Corporation

PATLITE KOREA CO., LTD.

PATLITE MEXICO S.A. de C.V.

PATLITE TAIWAN CO., LTD.

PATLITE Europe GmbH

PATLITE (THAILAND) CO., LTD.

PATLITE UK LTD

PATLITE (SINGAPORE) PTE LTD

PATLITE (CHINA) Corporation

PT. PATLITE INDONESIA

[www.patlite.com](http://www.patlite.com)

●PATLITE, the PATLITE logo are either registered trademarks or trademarks of PATLITE Corporation in JAPAN and/or other countries.

### CAUTION

To ensure correct use of these products, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.

O-BB02B EN 2209 A