Surface mounted lights | MIDILED



The MIDILED is the right choice if a strong, flat illumination is required, but where the working area at the machine offers very little space. The LED light provides daylight white illumination in the machine room. It can be attached via the stainless steel mounting bracket and its inclination can be adjusted.

The Technology

- Crack-resistant safety glass, 4 mm thick
- Heat dissipation via rear aluminium base body
- IP68 degree of protection

Your benefits

- Strong surface illumination, flicker-free without UV and IR components
- Very compact (total length: 148 mm)
- Simple upgrading or retrofitting in machine tools
- Chip bombardment-proof and oil-resistant

Areas of application

- for machines or working environments with very little space
- Lathes, drilling, milling and grinding machines

Designs


 Very compact LED light for fixture using the mounting bracket made of stainless steel, adjustable at an angle of ±30°

Surface mounted lights | MIDILED



| MIDILED, 5200-5700K | Product no. | Optics | E _{max} * | Lamp luminous flux | Output | Connection |
|---------------------|-------------|--------|--------------------|--------------------|--------|------------|
| MIDILED | 110614-01 | 120° | 1118 lx | 882 lm | ~7 W | 24V DC |

Incl. V2A mounting bracket for pivotable mounting
Power supply units and connection material, see Accessories.

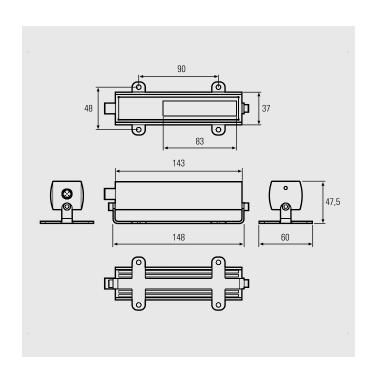

^{*} maximum lighting intensities, measurement area 100 cm x 100 cm at 100 cm distance